


Machinery Eyebolt Reference Dimensions & Rated Capacities

Stock No.		A	B	C	D	E		F	G	H	J	Rated Capacity Lbs.	Thread Size UNC-2A
Shoulder	Plain	Shank Dia.	Shank Length	Eye I.D.	Eye O.D.	Shoulder	Plain	Eye Sect Dia.	Shldr. Dia.	Shldr. Thick.	Location		
K2021	K2001	0.25	1.00	0.69	1.19	2.22	2.06	0.19	0.50	0.12	0.69	500	1/4-20
			1.06	0.81		2.53	2.38	0.25	0.56	0.19	0.81		
K2022	K2002	0.31	1.12	0.81	1.44	2.66	2.44	0.25	0.56	0.12	0.88	900	5/16-18
			1.19	0.94		2.97	2.75	0.31	0.62	0.19	1.00		
K2023	K2003	0.38	1.25	0.94	1.69	3.09	2.81	0.31	0.62	0.12	1.06	1,300	3/8-16
			1.38	1.06		3.47	3.19	0.38	0.69	0.19	1.19		
K2024	K2004	0.44	1.38	1.00	1.81	3.41	3.06	0.34	0.75	0.19	1.19	1,800	7/16-14
			1.50	1.12		3.78	3.44	0.41	0.81	0.25	1.31		
K2025	K2005	0.50	1.50	1.12	2.12	3.81	3.50	0.44	0.88	0.19	1.31	2,400	1/2-13
			1.62	1.25		4.19	3.88	0.50	0.94	0.25	1.44		
K2026	K2006	0.56	1.62	1.19	2.25	4.19	3.75	0.47	0.94	0.22	1.50	3,000	9/16-12
			1.75	1.31		4.56	4.12	0.53	1.00	0.28	1.62		
K2027	K2007	0.62	1.75	1.31	2.56	4.56	4.19	0.56	1.00	0.25	1.59	4,000	5/8-11
			1.88	1.44		4.94	4.56	0.62	1.06	0.31	1.72		
K2028	K2008	0.75	2.00	1.44	2.81	5.06	4.69	0.62	1.12	0.25	1.72	5,000	3/4-10
			2.12	1.56		5.50	5.06	0.69	1.25	0.31	1.91		
K2029	K2009	0.88	2.25	1.56	3.19	5.75	5.31	0.75	1.31	0.31	2.03	7,000	7/8-9
			2.38	1.69		6.19	5.69	0.81	1.44	0.38	2.22		
K2030	K2010	1.00	2.50	1.69	3.56	6.44	5.94	0.88	1.50	0.38	2.22	9,000	1-8
			2.62	1.81		6.88	6.31	0.94	1.62	0.44	2.41		
K2031	K2011	1.12	2.75	1.94	4.06	7.31	6.69	1.00	1.69	0.44	2.59	12,000	1 1/8-7
			2.88	2.06		7.75	7.06	1.06	1.81	0.50	2.78		
K2032	K2012	1.25	3.00	2.12	4.44	8.00	7.31	1.09	1.88	0.50	2.84	15,000	1 1/4-7
			3.12	2.25		8.44	7.69	1.16	2.00	0.56	3.03		
K2034	K2014	1.50	3.50	2.44	5.19	9.22	8.56	1.31	2.12	0.50	3.19	21,000	1 1/2-6
			3.62	2.56		9.72	8.94	1.38	2.25	0.62	3.44		
K2035	K2015	1.75	3.75	2.75	6.00	10.50	9.50	1.50	2.50	0.50	3.88	28,000	1 3/4-5
			3.88	3.00		11.12	10.12	1.62	2.62	0.62	4.12		
K2036	K2016	2.00	4.00	3.06	6.88	11.53	10.56	1.75	2.88	0.62	4.25	38,000	2-4 1/2
			4.12/4.25	3.44		12.22	11.44	1.88	3.00	0.75	4.50		
K2037	K2017	2.50	5.00	3.81	8.50	14.59	13.19	2.19	3.62	0.88	5.50	56,000	2 1/2-4
			5.25	4.19		15.40	14.06	2.31	3.75	1.00	5.75		

Reprinted from ASME B18.15-1985 (R1995), by permission of The American Society of Mechanical Engineers. All Rights Reserved.

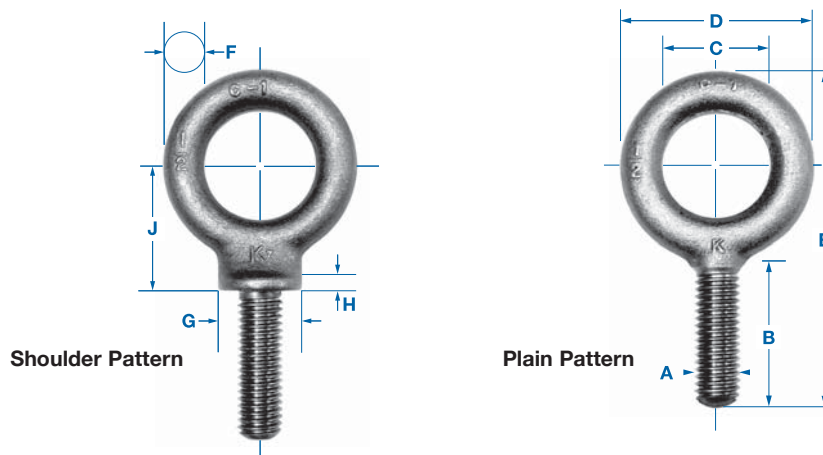

Caution: Rated capacity is for 0° vertical pulls. See Eyebolt Rated Capacity/Guidelines (page 7) for complete lifting information. Reference ASME B18.15 for additional dimensions. Swivel Hoist Rings (page 63) are recommended for angular lifts.